

Product Data Sheet 4114N/2H6PU

**ebmpapst**

Die Wahl der Ingenieure



4114N/2H6PU

INDEX

**1 General ..... 3**

**2 Mechanics ..... 3**

2.1 General ..... 3

2.2 Connections ..... 3

**3 Operating Data ..... 5**

3.1 Operating Data - Electrical Interface - Input ..... 5

3.2 Electrical Operating Data ..... 6

3.3 Operating Data - Electrical Interface - Output ..... 7

3.4 Electrical Features ..... 8

3.5 Aerodynamics ..... 10

**4 Environment ..... 11**

4.1 General ..... 11

4.2 Climatic Requirements\*) ..... 11

**5 Safety ..... 12**

5.1 Electrical Safety ..... 12

5.2 Approval Tests ..... 12

**6 Reliability ..... 12**

6.1 General ..... 12

**1 General**


Fan type	Fan	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air intake over struts	
Bearing system	Stainless steel bearing	
Mounting position	Any	

**2 Mechanics****2.1 General**

Width	119,0 mm	
Height	119,0 mm	
Depth	38,0 mm	
Mass	0,390 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 420 Ncm remaining corners: 600 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

**2.2 Connections**

Electrical connection	Wires	
Lead wire length	L = 310 mm	
Tolerance	+ - 10,0 mm	
Wire size (AWG)	22	
Insulation diameter	1,70 mm	
Contact	See drawing	

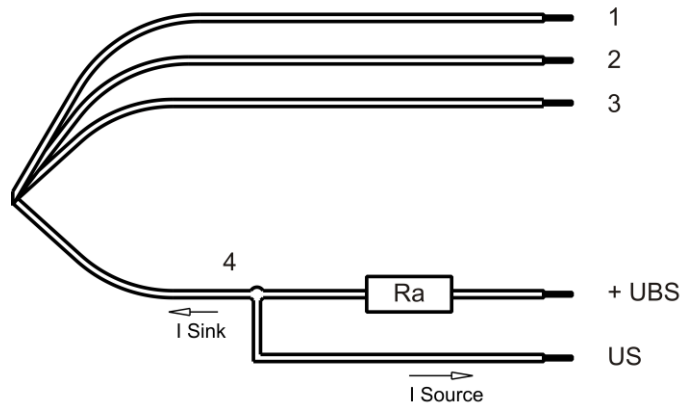

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	PWM
Wire 4	white	Tacho

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.



### 3 Operating Data

#### 3.1 Operating Data - Electrical Interface - Input

Control input	PWM
---------------	-----

#### Features

Input type	Open collector	
PWM - Frequency		1 kHz - 10 kHz Typical: 2 kHz

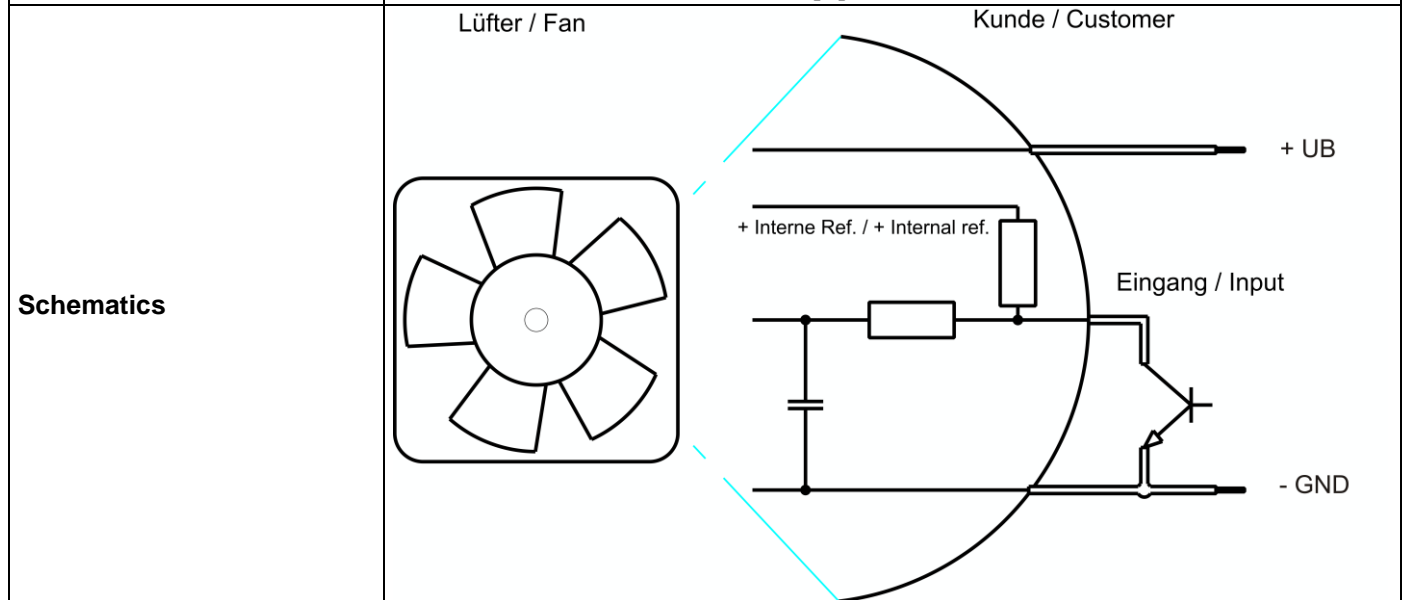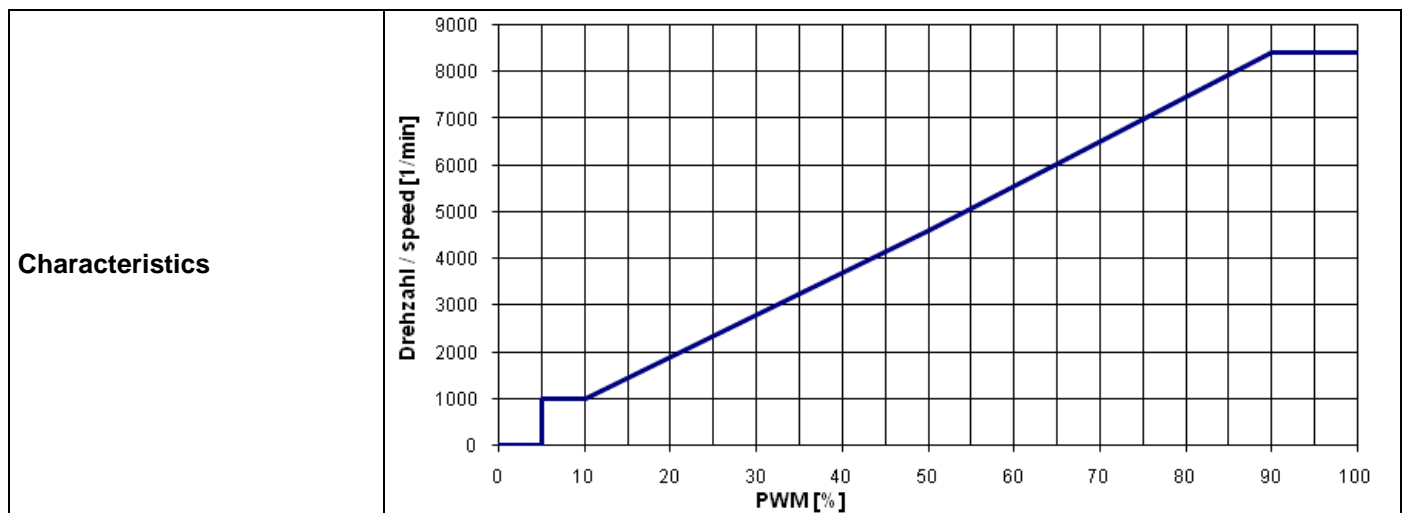

**Speed control:** (+5V) has 4.7kOhm. By PWM: 0...100 %. The shown pull-up resistor to the internal reference voltage

**Transistor requirements:** VCE max.  $\geq$  12V; Isink max  $>$  5mA; VCEsat  $<$  0,15V

### 3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see section 3.5)  
 I: corresp. to arithm. mean current value

Name	Condition
PWM 0001	PWM: 95 %; f: 2 kHz

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	16,0 V		30,0 V
Nominal voltage	$\Delta p = 0$	$U_N$		24,0 V	
Power consumption	$\Delta p = 0$	P	48,0 W	66,0 W	67,5 W
Tolerance	PWM 0001		+/- 15,0 %	+/- 10,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	3.070 mA	2.750 mA	2.250 mA
Tolerance	PWM 0001		+/- 15,0 %	+/- 10,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	7.600 1/min	8.400 1/min	8.400 1/min
Tolerance	PWM 0001		+/- 10,0 %	+/- 5,0 %	+/- 5,0 %

#### Note to inrush current @ U nom:

The internal electrolytic capacitor 390uF / 35V has no resistor or inrush current limitation, essentially the type and length of the connecting cable is limiting the Inrush current.


Name	Condition
PWM 0003	PWM: 8 %; f: 2 kHz

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	16,0 V		30,0 V
Nominal voltage	$\Delta p = 0$	$U_N$		24,0 V	
Power consumption	$\Delta p = 0$	P	1,05 W +- 20,0 %	1,4 W +- 20,0 %	1,75 W +- 20,0 %
Tolerance	PWM 0003				
Current consumption	$\Delta p = 0$	I	65 mA +- 20,0 %	60 mA +- 20,0 %	58 mA +- 20,0 %
Tolerance	PWM 0003				
Speed	$\Delta p = 0$	n	1.000 1/min +- 10,0 %	1.000 1/min +- 10,0 %	1.000 1/min +- 10,0 %
Tolerance	PWM 0003				

### 3.3 Operating Data - Electrical Interface - Output


Tacho type	/2 (open collector)
------------	---------------------

Signal-Ausgangsspannung / Signal output voltage

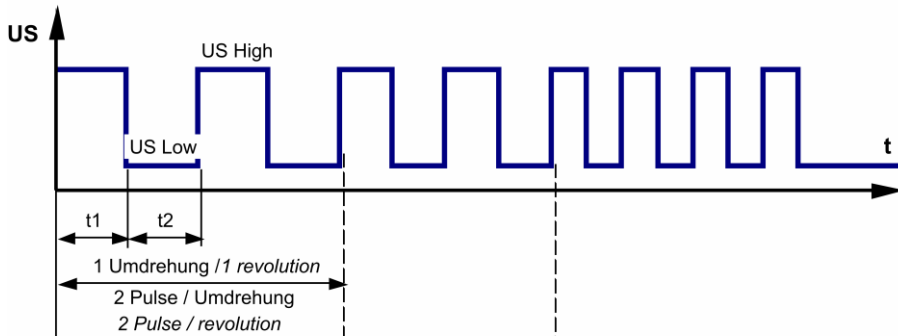

$$R_a = \frac{U_{BS} - US_{Low}}{I_{Sink}}$$

Lüfter-Drehzahl / Fan speed

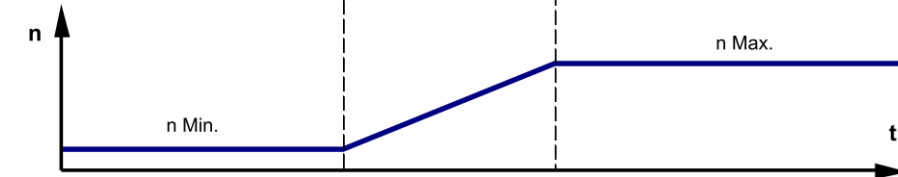


Features	Note	Values
Tacho operating voltage (UBS)		$\leq 30\text{ V}$
Tacho signal Low	I sink: 2 mA	$\leq 0,4\text{ V}$
Tacho signal High	I source: 0 mA	$\leq 30\text{ V}$
Maximum sink current		$\leq 10\text{ mA}$
External resistor	External resistor $R_a$ from UBS to US required. All voltages measured to GND.	
Tacho frequency	$(2 \times n) / 60$	
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5\text{ V/us}$

Alarm type	None
------------	------

### 3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	P-CH FET	
Max. residual current at $U_n$	IF $\leq 10\text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at $U_n$	approx. 2.400 mA	
Clock signal $t_3/t_4$ at locked rotor	Typical: 0,5 s / 5,0 s $t_3$ : 0,4 s... 0,6 s $t_4$ : 4,8 s... 5,2 s	

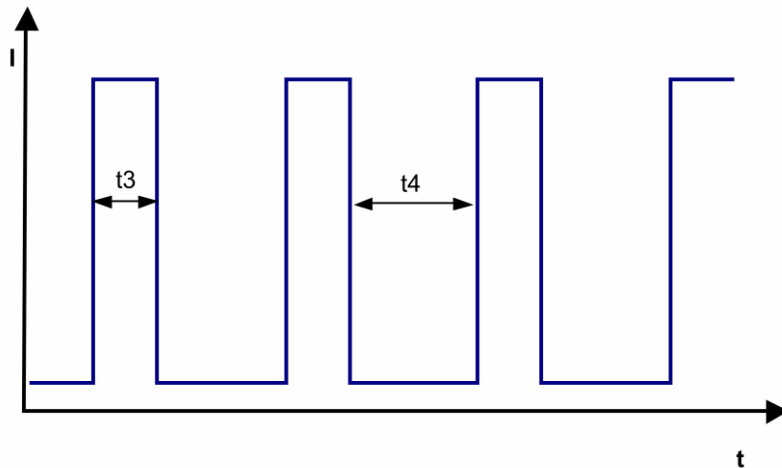


The locked rotor current is denoted as peak-current at nominal voltage.






Locked rotor current @ 24 V (I = 500mA/div ; t = 1s/div)

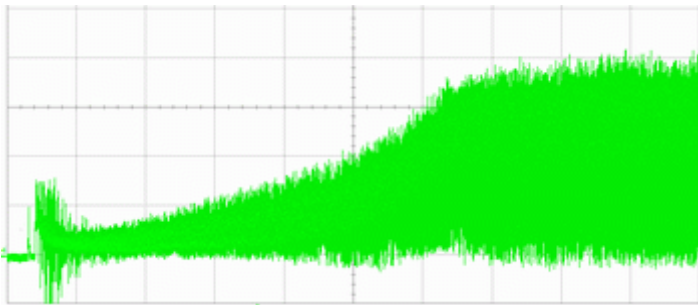

Start-up current @ 24 V (I = 1A/div ; t = 1s/div)

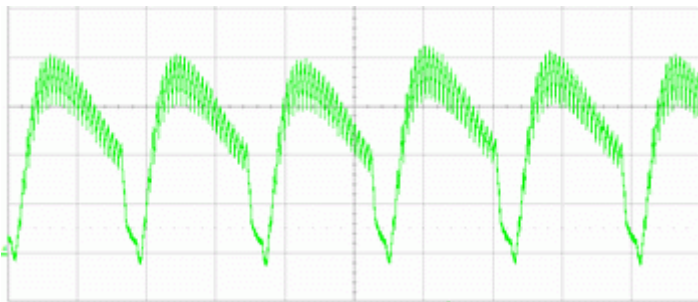

Running current @ 24 V (I = 1A/div ; t = 1ms/div)

**Internal Fuse:**


Littelfuse NANO2(R) FUSE; Very fast acting 451 Series; 7 A (Art.-Nr.: 0451007.MRL)

### 3.5 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

8.400 1/min at free air flow	PWM 95 %; f: 2 kHz		
Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )		425,0 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ )		860 Pa	

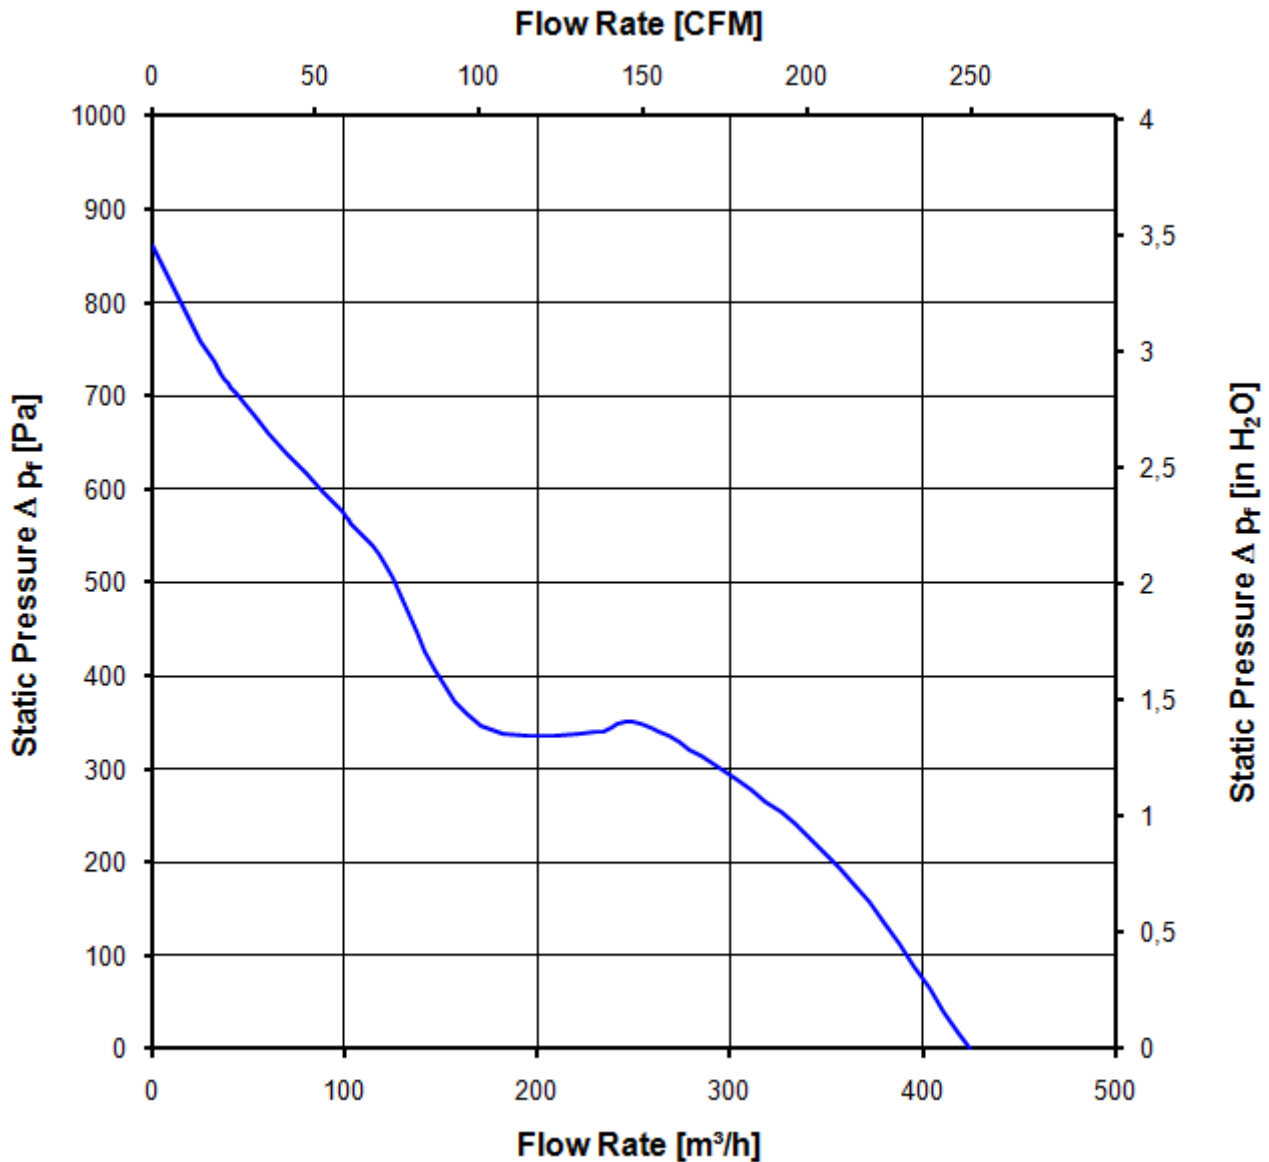

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

### 4.2 Climatic Requirements \*)

IP-protection type (certified)	IP 68 (for fan only, not for connector if applicable) **)	
Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Salt fog requirements	salt fog, cyclic, in operation; according to DIN EN 60068-2-52, 3 cycle	

\*) Permitted application area:

The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

\*\*\*) The specification of the IP protection refers to the conditions mentioned in certification of the fan. The above mentioned short description of the protection scope is not final. For detailed information of the respective protection scope and definitions, see certification as well as DIN EN 60529 (protection by housings) and ISO 20653 (for vehicles) with the letter K.

#### **Short description of the IP-protection type:**

Solid particle Protection: Dust tight.

Protection against deliberate contact: Protected against contact to hazardous parts with a wire.

Protection against water: The fan test according to IP68 (Based on IEC 60529), is conducted in non-operating mode. The fan is tested by a complete immersion in water for a period of 2h at a water-level of 1,2m. Electrical connections are not immersed since they are customer specific.

Please require severity levels and specification parameters from the responsible development departments

**5 Safety**

**5.1 Electrical Safety**

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

**5.2 Approval Tests**

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL audited by CSA according to UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	No

The approval tests are observed to:  
U approval max.:30,0 V @ TU approval max.: 65,0 °C


**6 Reliability**

**6.1 General**

Life expectancy L10 at TU = 40 °C	60.000 h	
Life expectancy L10 at TU max.	32.500 h	
Life expectancy L10 Delta (40 °C)	120.000 h	

Copying of this document, and giving it others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schulzwerk nach DIN ISO 9018 beachten!  
Refer to protection notices DIN ISO 9018!

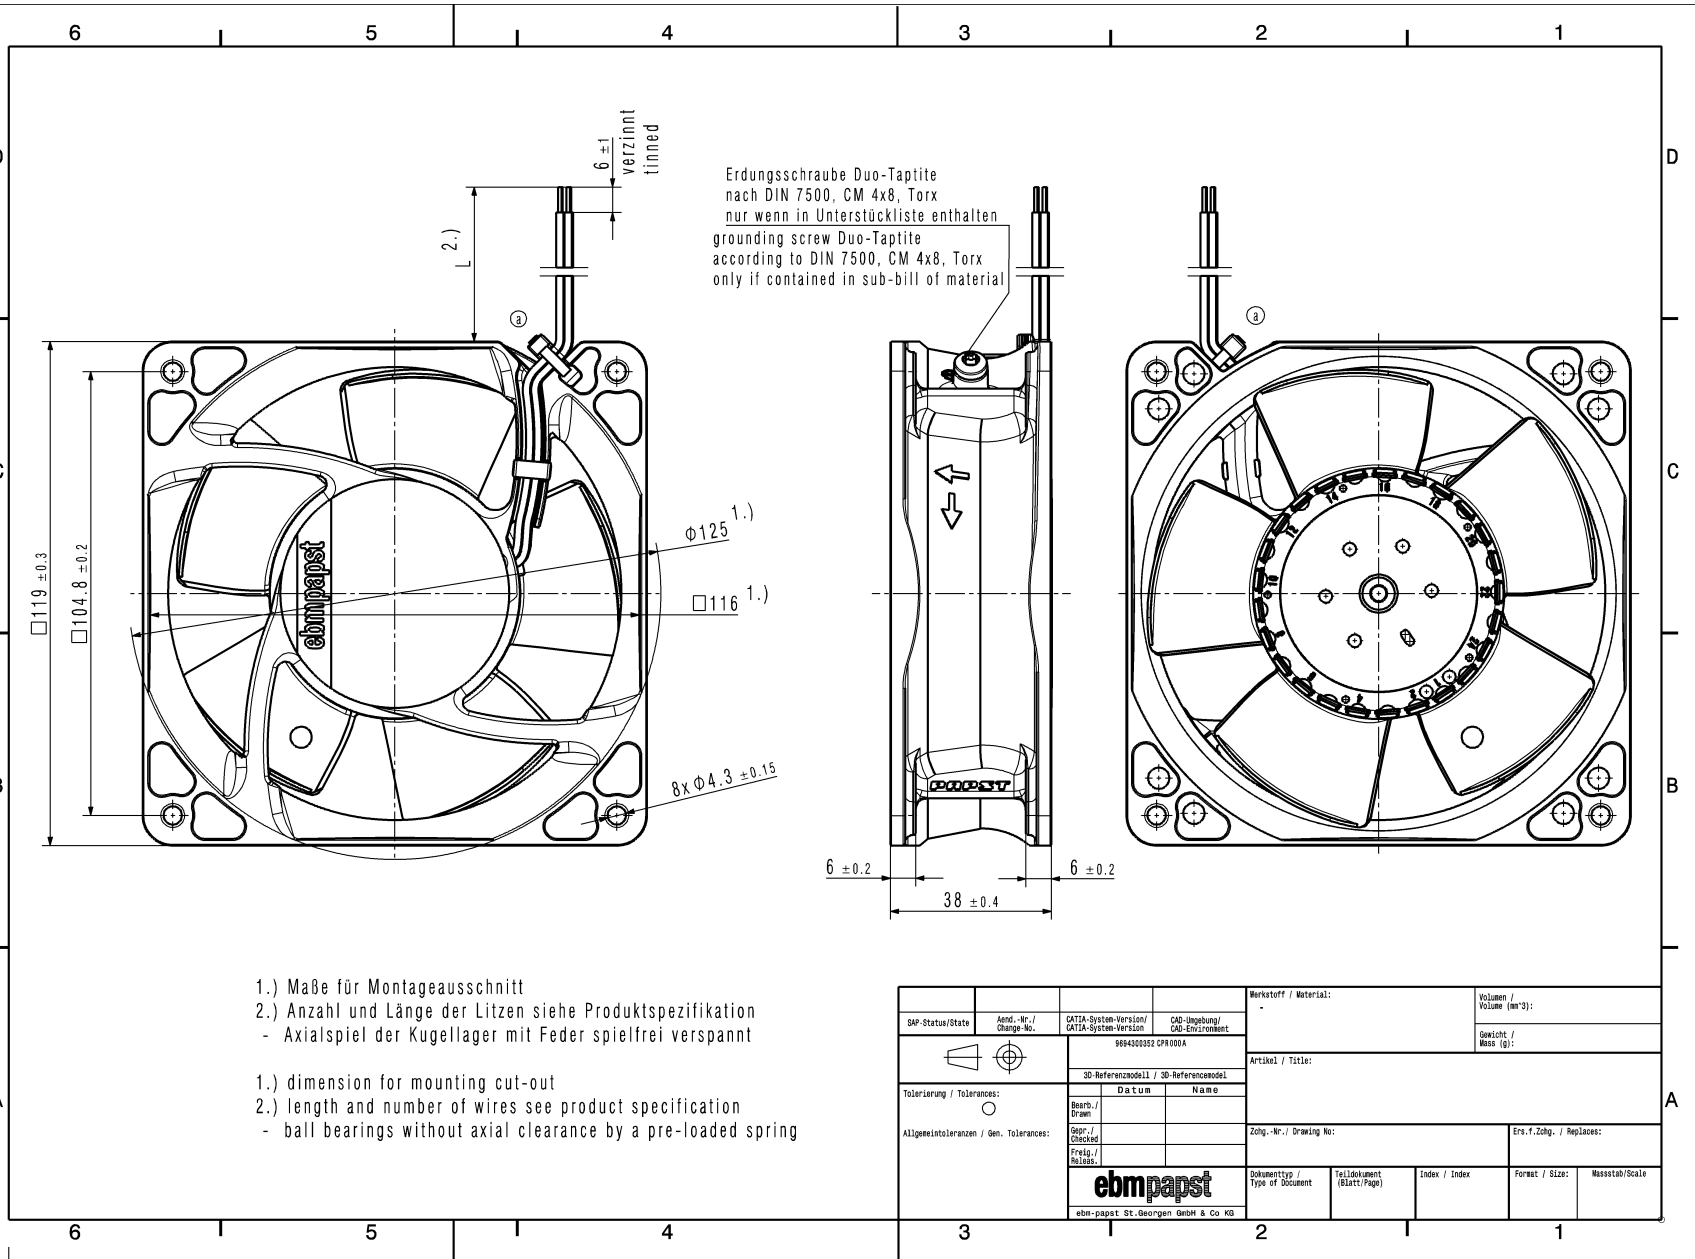

Erdungsschraube Duo-Taptime  
nach DIN 7500, CM 4x8, Torx  
nur wenn in Unterstückliste enthalten  
grounding screw Duo-Taptime  
according to DIN 7500, CM 4x8, Torx  
only if contained in sub-bill of material

- 1.) Maße für Montageausschnitt
  - 2.) Anzahl und Länge der Litzen siehe Produktspezifikation  
- Axialspiel der Kugellager mit Feder spielfrei verspannt
- 1.) dimension for mounting cut-out  
2.) length and number of wires see product specification  
- ball bearings without axial clearance by a pre-loaded spring

BSP-Status/State		Änd.-Nr./ Change-No.		CATIA-System-Version/ CATIA-system-version		CAD-Übersetzung/ CAD-Environment		Werkstoff / Material:		Volumen / Volume (cm <sup>3</sup> ):	
						9994000392 CPR000A				Gewicht / Mass (g):	
Tolerierung / Tolerances:		Datum		Name		3D-Referenzmodell / 3D-Reference Model		Artikel / Title:			
Allgemeintoleranzen / Gen. Tolerances:		Begr./ Exam		Zchg.-Nr. / Drawing No:		Ers.-f.Zchg. / Replaces:		Dokumenttyp / Type of Document			
		Gepr./ Checked		Freig./ Released		Teilnummer / (Date/Page)		Index / Index		Format / Size:	
						ebmpapst		eBm-papst St. Georgen GmbH & Co KG		Masstab/Scale	